


KV 音箱系列

KV-150

15" TWO-WAY SPEAKER SYSTEM
单15"两分频全音域音箱

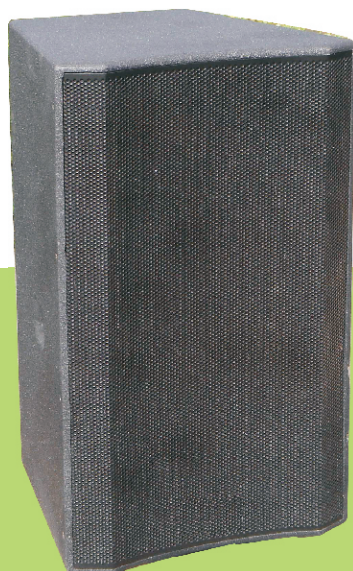


FREQUENCY RANGE	频率响应	35-20KHz
POWER HANDLING	标称功率	500W
NOMINAL IMPEDANCE	标称阻抗	8 ohm
SENSITIVITY (dB/1m1w)	灵敏度	102dB
NOMINAL DISPERSION	散射角度	90° × 60°
DIMENSIONS (H*W*D)	箱体尺寸	710 × 436 × 438mm
NET WEIGHT	净重	38.3kg

The KV-150 is a 2-way full range system in a trapezoidal, computer optimized enclosure. Loud speaker complement consists of an 15" LF woofer in a ported sub-enclosure, and a single 1.5" compression driver mounted on a 90° × 60° horn. A factory optimized internal crossover is installed to ensure balanced output between the HF and LF components. The enclosure is constructed of durable 13-ply void-free birch laminate, dadoed for strength and durability. Integrated eyebolt receptacles are located on the top of the system to facilitate a vertical installation. Perforated steel is employed for frontal protection of the loud speaker complement.


使用范围

会议室、宴会厅、教室、演艺厅、的士高、慢遥吧、卡拉OK、礼堂、教堂、俱乐部、会所

Response data

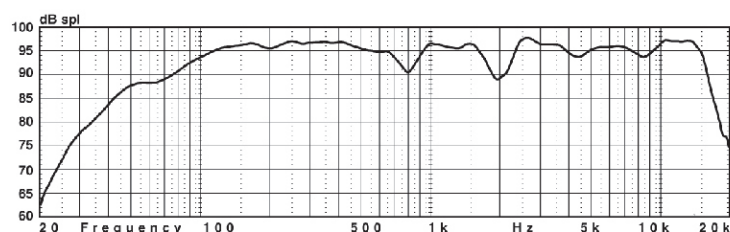

on axis response (2.83v@1m, free-field conditions)

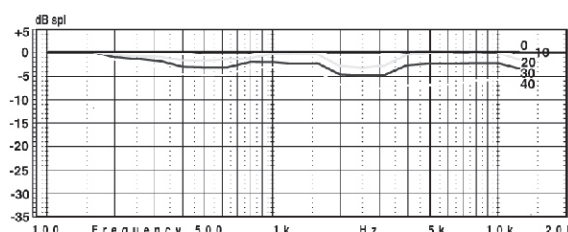

off axis response (normalized to on axis response)