

## MK 音箱系列

### MK-15

**15" TWO-WAY SPEAKER SYSTEM**  
单15"两分频全音域音箱




FREQUENCY RANGE	频率响应	35-20KHz
POWER HANDLING	标称功率	500W
NOMINAL IMPEDANCE	标称阻抗	8 ohm
SENSITIVITY ( dB/1m1w )	灵敏度	102dB
NOMINAL DISPERSION	散射角度	90° × 60°
DIMENSIONS ( H*W*D )	箱体尺寸	725 × 432 × 410mm
NET WEIGHT	净重	34.4kg

The MK-15 is a 2-way full range system in a trapezoidal, computer optimized enclosure. Loud speaker complement consists of an 15" LF woofer in a ported sub-enclosure, and a single 1.5" compression driver mounted on a 90° × 60° horn. A factory optimized internal crossover is installed to ensure balanced output between the HF and LF components. The enclosure is constructed of durable 13-ply void-free birch laminate, dadoed for strength and durability. Integrated eyebolt receptacles are located on the top of the system to facilitate a vertical installation. Perforated steel is employed for frontal protection of the loud speaker complement.


#### 使用范围

会议室、宴会厅、教室、演艺厅、的士高、慢遥吧、卡拉OK、礼堂、教堂、俱乐部、会所

## Response data

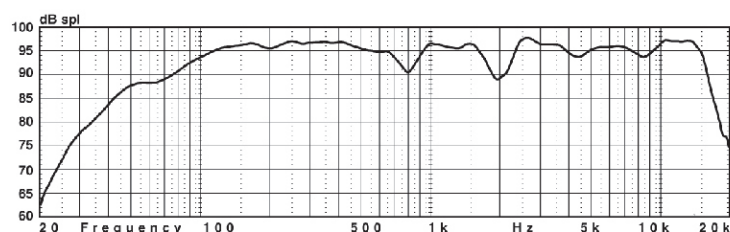

on axis response (2.83v@1m, free-field conditions)

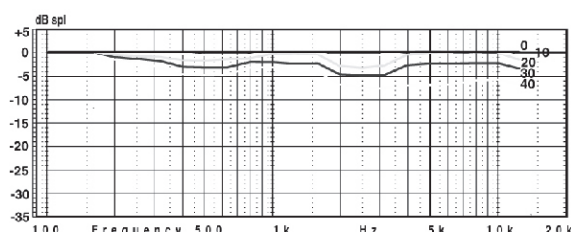

off axis response (normalized to on axis response)